

**PROFESSIONAL PEST MANAGEMENT
POWER TOOL**

Exacticide

By

Technicide


Since 1987

1 800 950-5866

Owners Manual

Contents

- ◆ **Introduction**
- ◆ **Packing List**
- ◆ **General Instructions**
- ◆ **Maintenance**
- ◆ **Storage**
- ◆ **Accessories**
- ◆ **Warranty**
- ◆ **Additional Maintenance**

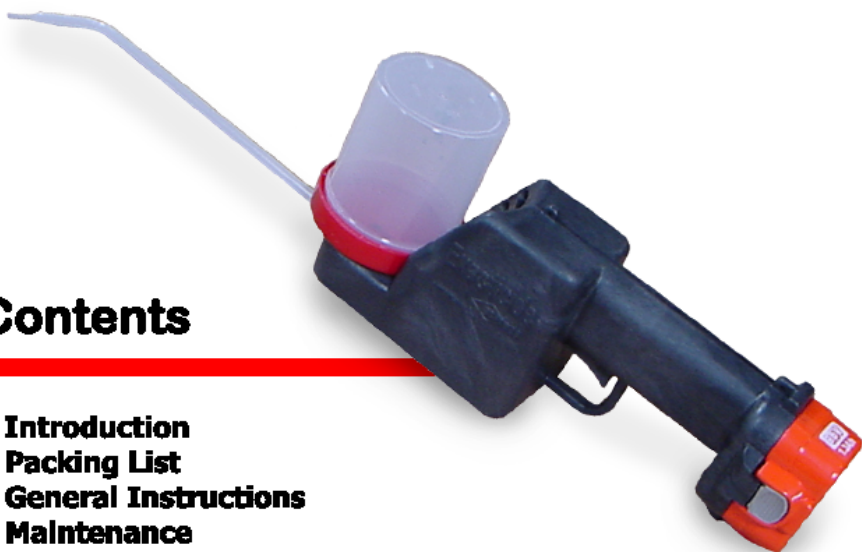

2006

Introduction

You have chosen the most versatile pesticide applicator in the industry. Technicide is the leader in innovative equipment. As an owner of the Exacticide applicator, it is feasible that you can effectively treat your entire account with this one remarkable applicator. The EXACTICIDE defines the saying, less is more. Here is why:

Interior and Exterior Applications:

Low Volume: Precision dusting to cracks and voids; Apply exactly the right amount of dust to control a wide variety of pests, no more, no less, no mess.

Low Volume: Precision granule placement to cracks, voids, walkway edges, and perimeters; Apply exactly the right amount of granules and granule baits in exactly the right place, no waste.

Inventory Control: The Exacticide not only prevents over application, but a simplified system is available to keep track of the exact amount of pesticides used on each account as well as an entire route. The pesticide canisters have a measuring meter on the side. Levels can be logged in, as well as the number of canisters used on a given day or route.

The EXACTICIDE strengthens employee morale: Just as cordless drills and power saws have made the job easier for carpenters, the portability of the EXACTICIDE simplifies the application process. In addition, the EXACTICIDE is lightweight, precisely balanced, to allow your technicians to make treatments without undo physical strain. Its professional appearance gives the Technician confidence that your customer will be impressed with the application method chosen by your company.

Reliability: Technicide, Inc. has been providing the Professional Pest Management Operator with reliable equipment for over a century. Combine the century proven Technicide name with the advanced battery technology of Makita USA, Inc. and you have a powerful team behind your purchase.

Thank you for choosing Technicide Equipment. It is our goal to live up to your expectations. If you have any questions or concerns please contact us at 1 800 950-5866. For sales call you local distributor.

Jim Harper
President

PROFESSIONAL PEST MANAGEMENT POWER TOOL

Packing List

1. EXACTICIDE applicator
2. Two 10" application wands
3. Two chemical canisters
4. One Makita 9.6V Battery
5. One Makita A/C Charger
6. One carrying carton

Please notify Technicide, Inc. if any of the Items are missing.. 1 800 950-5866

General Operating Instructions: To begin using your new Exacticide applicator please do the following.

1. **Charge your Makita Battery; Plug battery charger in 110V outlet. Place Battery in charger. Make sure red light is on. Allow 50 full minutes to receive a full charge.**
2. **Once the battery is fully charged squeeze the gray tabs on each side of the battery and push into the Exacticide until secured in place. Reverse this procedure to remove the battery.**



3. **Attach pre-filled chemical canister to your Exacticide unit, by turning the Exacticide over so that the trigger is on the top. (as shown on fig 3.1) Remove the Chemical canister cap and twist the chemical canister up into the Exacticide receiver. When secure, turn the unit over for operation.**



4. **To apply your chosen pesticide place the wand into the nozzle port and twist until snug. Insert the wand tip into a crack, void or in the direction of the target application area and squeeze the trigger. Release the trigger to stop application.**

Reliable

General Operating Instructions

Label All Pesticide Containers

Changing from one pesticide to another pesticide

1. Turn the EXACTICIDE over so that the trigger is on the top. Place the wand in the direction of your target application site, and squeeze the trigger. This will allow any excess pesticide to be flushed out of the system. Once you have flushed the system hold the unit in a Horizontal upside down position, twist off the canister, and reinstall the cap for storage. In reverse order place the new canister on the EXACTICIDE unit.

Products that can be used in your Exacticide

1. Most forms of dust products. Note: Drifone is not recommended, but may be used if mixed 3 parts Borid, 1 part Drifone, if the label permits.
2. All forms of fine granules and fine granule baits. (FINE GRANULES ONLY)

Maintenance:

Always flush out the system on the last application area prior to suspended use. To flush the system turn the EXACTICIDE over as shown on page 3. Place the tip in to a crack or void and squeeze the trigger, allow enough time for the air flow to completely flush the system.

Storage:

For protection of your EXACTICIDE applicator store in original carton. Do not store with chemical canister attached. Keep out of direct sun light when not in use.

Do not store where unit can come in contact with water, rain etc.

Repairs, Ship to: Technicide, Inc.
47 Via Ceramica San Clemente, CA 92673

Accessories



Canister storage Case



**Battery and Charger
Car charger Available**



Bag of Ten Wands




Chemical Canisters



**Bee Pole Adapter Kit
with 18 ft of hose.
Pole not included**



**Monster Hook
for easy tote**



**6 foot hose extension
& 12 inch. wand extenders**

Warranty

All Technicide manufactured components are warranted for one year. This includes exterior housing, feeder gear, manifold assembly and canister receiver. This warranty does not cover hoses, canisters, wands, or parts damaged due to neglect or accident. Electrical parts will be covered for a period of 90 days from the original date of purchase.

Within the warranty period, we will repair any part found to be defective upon our examination. Shipping costs remain the customer's responsibility. Merchandise may not be returned without making prior arrangements with Technicide, and must be shipped to Technicide with freight prepaid in the original carton and packing materials. This warranty service is an exclusive remedy and Technicide is not responsible for consequential incidental damages or injury to persons or property.

This warranty shall not apply to any product which has been subject to misuse, negligence, or been damaged in shipping, or which has been modified or repaired by an unauthorized person. This warranty only applies to this product owned by the original owner. The right is reserved to incorporate subsequent designed or parts changes after publication and without reissue of descriptive literature or catalogs.

To obtain warranty service call or fax your request to Technicide at 1 800 950-5866 Fax 909 279-7821

Warning: Please empty all insecticides from equipment and remove any insecticide residue, to avoid a \$50.00 detoxification fee.

In order to register the foregoing warranty, complete and sign below. Copy this form and mail to Technicide, Inc. P.O. Box 17147 Anaheim, CA 92817 Also mail a copy of your original invoice for proof of purchase.

Model _____

Date Purchased _____

Your Company _____

Company Address _____

City, State, Zip code _____

Telephone, fax, e-mail _____

Authorized Signature _____

Note: Photo copy this sheet and fax or mail with credit card payment with-in 60 days of date of purchase.

Extended Warranty \$89.99 Page 7

2 year with life time limited warranty

All Technicide manufactured components are warranted for a lifetime. This includes exterior housing, feeder gear, manifold assembly and canister receiver. This warranty does not cover hoses, canisters, wands, or parts damaged due to neglect or accident. Electrical parts will be covered for a period of 2 years from the original date of purchase.

Within the warranty period, we will repair any part found to be defective upon our examination. Shipping costs remain the customers responsibility. Merchandise may not be returned without making prior arrangements with Technicide, and must be shipped to Technicide with freight prepaid in the original carton and packing materials. This warranty service is an exclusive remedy and Technicide is not responsible for consequential incidental damages or injury to persons or property.

This warranty shall not apply to any product which has been subject to misuse, negligence, or been damaged in shipping, or which has been modified or repaired by an unauthorized person. This warranty only applies to this product owned by the original owner. The right is reserved to incorporate subsequent designed or parts changes after publication and without reissue of descriptive literature or catalogs.

To obtain warranty service call or fax your request to Technicide at 1 800 950-5866
Fax 714 442-9638

Warning: Please empty all insecticides from equipment and remove any insecticide residue, to avoid a \$50.00 detoxification fee.

In order to register the foregoing warranty, complete and sign below. Copy this form and mail to Technicide, Inc. P.O. Box 74503 San Clemente, CA 92673 Also mail a copy of your original invoice for proof of purchase.

Model _____

Date Purchased _____

Your Company _____

Company Address _____

City, State, Zip code _____

Telephone, fax, e-mail _____

Authorized Signature _____

Note: Photo copy this sheet and fax or mail with credit card payment with-in 60 days of date of purchase.

Visa or Mastercard # / / / Exp. Date _____ / _____

Additional Maintenance

Maintenance and Cleaning Instructions

To ensure that your Exacticide Applicator operates to its optimum performance level, we strongly recommend that the following steps are followed.

1. At The end of each use, purge the system by turning the Exacticide upside down, press the trigger until only air is being discharged. Make sure you perform this step while directing the product being discharged into a target application site.

2. At the end of each week lubricate the chemical feeder gear. This is done by first completing step one. While your Exacticide applicator is in the upside down position, remove the chemical canister, then turn the Exacticide right side up and spray a dry lubricant directly into the feeder gear.

3. Clean electrical trigger contacts: if at anytime your unit hesitates or doesn't seem run at full power with a resently charged battery. Its time to clean the trigger contacts. You will need a fine file or sand paper. Open the unit by removing the seven screws that hold it together. Once open file or sand the the flat side of the contacts, until your units is running at full power.