





Tomahawk Dura-polyTrap

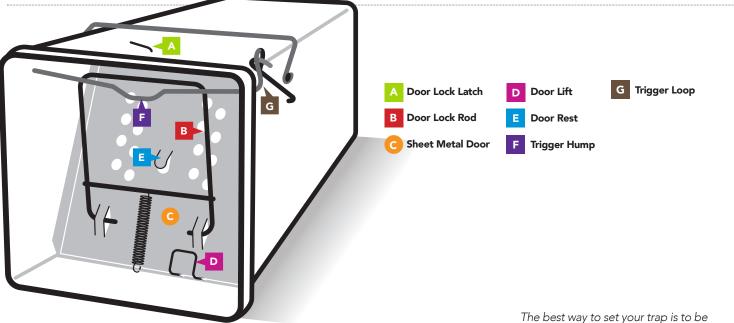

Set the Trap

in front of it, facing the door

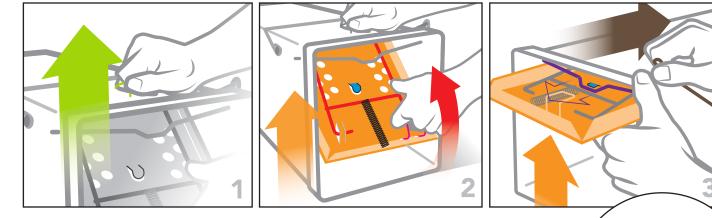

- **1.** Locate and lift the **(A)** door lock latch, the small wire located at the top, front, center of trap. *See above*. Lift portion of latch nearest the front of the trap so the latch inside the trap is flush against the top inside of the trap. This will allow the door to move freely.
- Open the door by pushing (B) the spring mounted door lock rod with your thumb inward while lifting (C) sheet metal door by using your index and middle finger in the (D) door lift. Lift until it comes into contact with the (E) door rest. The door rest is the small tab that protrudes from the center of the sheet metal door.



3. While continuing to hold the door open, push (G) trigger loop away from you toward the back of the trap. This will allow the door to be raised to the top of the trap and the (F) trigger hump to clear the (E) door rest. Once clear, pull the trigger loop toward the front of the trap so the trigger hump is under the door rest. Let go of the door to allow the door rest to settle on the trigger hump. Your trap is now set.